



5 / Product Color / Ürün Renk



Technical Drawing / Teknik Çizim

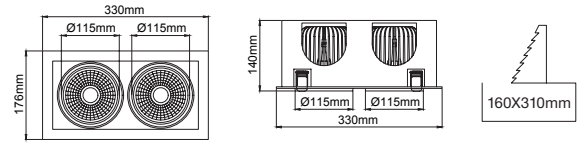

4 / Reflector Angle / Reflektör Açısı

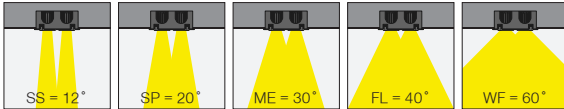

EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- 30° rotation on vertical and 30° angle on horizontal axis with mechanical aiming lock.
- Clear safety glass.
- Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.
- High tech control systems of Tuneable White, Warm Dim and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Available accessories are Honeycomb Filter and Colour Filter.
- Super Spot, Spot, Medium, Flood and Wide Flood beam angle options available with rotationally symmetric light distribution.
- Standart CRI>80, high CRI>90 and super high CRI>98 LED options available.
- Up to 130lm/W efficiency.
- High colour consistency: <3 SDCM
- Emergency kit system can be integrated.

TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji girişi.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Dikeyde 30°, yatayda 30° hareket kabiliyetine sahip mekanik kilitlemeli mafsal sistemi.
- Tamperli cam.
- Klasik DALI, 1-10V ve Faz DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM, Sıcak DIM ve Dinamik Beyaz uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bağlı özel renk seçenekleri uygulanabilir.
- Balpeteği Filtresi ve Renk Filtresi aksesuar seçenekleri uygulanabilir.
- Çok Dar, Dar, Orta, Geniş ve Çok Geniş reflektör açısı seçenekleri mevcuttur.
- Standart CRI>80, yüksek CRI>90 ve ekstra yüksek CRI>98 LED seçenekleri mevcuttur.
- 130lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM
- Acil aydınlatma kit sistemi uygulanabilir.

Manna / I01.MLR.09002



* Code example / Kod örneği:

I01.MLR.09002 . 42 . 827 . SS . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
2x42W	CRI>80	I01.MLR.09002 . (.) . (...) . (.) . (.)	2700K	10152
			3000K	10412
			3500K	10774
			4000K	10948
			5000K	11932
	CRI>90	I01.MLR.09002 . (.) . (...) . (.) . (.)	2700K	9134
			3000K	9370
			3500K	9696
			4000K	10036
			5000K	X
	CRI>98	I01.MLR.09002 . (.) . (...) . (.) . (.)	2700K	7400
			3000K	7668
			4000K	8200
Meat / Et COB		I01.MLR.09002 . (.) . (...) . (.) . (.)	1800K	6068
Food / Gıda COB		I01.MLR.09002 . (.) . (...) . (.) . (.)	2400K	6256
FISH / Balık COB		I01.MLR.09002 . (.) . (...) . (.) . (.)	6600K	8274

2	Watt - Driving Current / Watt - Sürüş Akımı	3				4		5	
		CRI / Kelvin				Reflector Angle / Reflektör Açısı		Product Color / Ürün Renk	
42	2x42W - 1050mA	827	CRI>80 - 2700K	9827	CRI>98 - 2700K	SS	2x12° - Super Spot	01	white
35	2x35W - 900mA	830	CRI>80 - 3000K	9830	CRI>98 - 3000K	SP	2x20° - Spot	02	ral 9010
31	2x31W - 800mA	835	CRI>80 - 3500K	9840	CRI>98 - 4000K	ME	2x30° - Medium	03	black
28	2x28W - 700mA	840	CRI>80 - 4000K	MEAT	1800K	FL	2x40° - Flood	04	gray
		850	CRI>80 - 5000K	GOLD	2400K	WF	2x60° - Wide Flood	05	dark gray
		927	CRI>90 - 2700K	FISH	6600K			06	special color
		930	CRI>90 - 3000K						
		935	CRI>90 - 3500K						
		940	CRI>90 - 4000K						

