




Bari DLK NT IP44 LED



Downlight for surface installation. Version DLK with square frame complements the series of round BARI luminaires

Materials: Powder painted, white aluminum ring, steel sheet body. Transparent tempered glass SH. Reflector made of polished aluminum with a purity of 99.85 %.

Installation: surface mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Voltage rating	220 ... 240 V
Power factor	0.96

MECHANICAL DATA

Housing material	Steel sheet
------------------	-------------

INFORMATION

Colour	White
--------	-------

CERTIFICATES

Degree of protection (IP)	IP44
Class of protection	I
Light source protection	Yes
HACCP+	Yes
EAC	Yes
Power Flicker	=< 3%

LIGHT DATA

Luminaire's luminous efficiency	74 %
Color rendering index	84
Light distribution	DI
Beam angle	60 °
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 60000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	91 %

OPTICAL DATA


Reflector	High gloss
-----------	------------

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Light source luminous flux [lm]	Luminaire luminous flux [lm]	Light source luminous efficacy [lm/W]	Luminaire's luminous efficacy [lm/W]	Colour temperature
PX4089700 DJ001.1189.830.A000	15	SH	1970	1600	164	107	3000K
PX4089721 DJ001.1189.840.A000	15	SH	2030	1640	169	109	4000K
PX4089707 DJ002.1189.830.A000	21	SH	2730	2210	152	105	3000K
PX4089728 DJ002.1189.840.A000	21	SH	2810	2270	156	108	4000K

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Light source luminous flux [lm]	Luminaire luminous flux [lm]	Light source luminous efficacy [lm/W]	Luminaire's luminous efficacy [lm/W]	Colour temperature
PX4089714 DJ003.1189.830.A000	29	SH	3720	3010	143	104	3000K
PX4089735 DJ003.1189.840.A000	29	SH	3820	3090	147	107	4000K
PX4089742 DJ001.1188.830.A000	15	SH MAT	1970	1460	164	97	3000K
PX4089763 DJ001.1188.840.A000	15	SH MAT	2030	1500	169	100	4000K
PX4089749 DJ002.1188.830.A000	21	SH MAT	2730	2020	152	96	3000K
PX4089770 DJ002.1188.840.A000	21	SH MAT	2810	2080	156	99	4000K
PX4089756 DJ003.1188.830.A000	29	SH MAT	3720	2750	143	95	3000K
PX4089777 DJ003.1188.840.A000	29	SH MAT	3820	2830	147	98	4000K

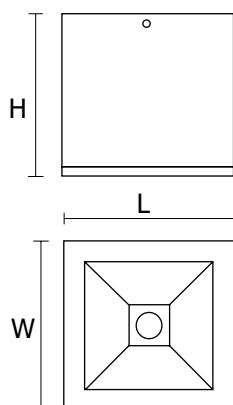

DIMENSIONS

L [mm]	W [mm]	H [mm]
169	169	165

L = Length | W = Width | H = Height / Depth