


Lyras 65 | 5 W | medium 30° | Projectors

Technical Specifications

Source lamp	LED 5 W
Total wattage	5
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	294 lm (400 lm*) @ 3000 K
Luminous efficacy	59 lm/W @ 3000 K
McADAM steps	3
Beam	medium 30°
CRI	>80
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	8
Insulation class	II

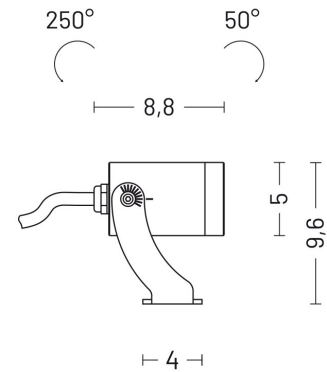


Materials

Body	Extruded aluminium EN AW6060
Diffuser	Extra clear tempered glass 8 mm
Finishing	Inox - Anodized

E (lux)

H (m)	lux (3000 K)	Ø (m)
1.00	524	0.6
2.00	131	1.2
3.00	58	1.8
4.00	33	2.4
5.00	21	3

Photometry

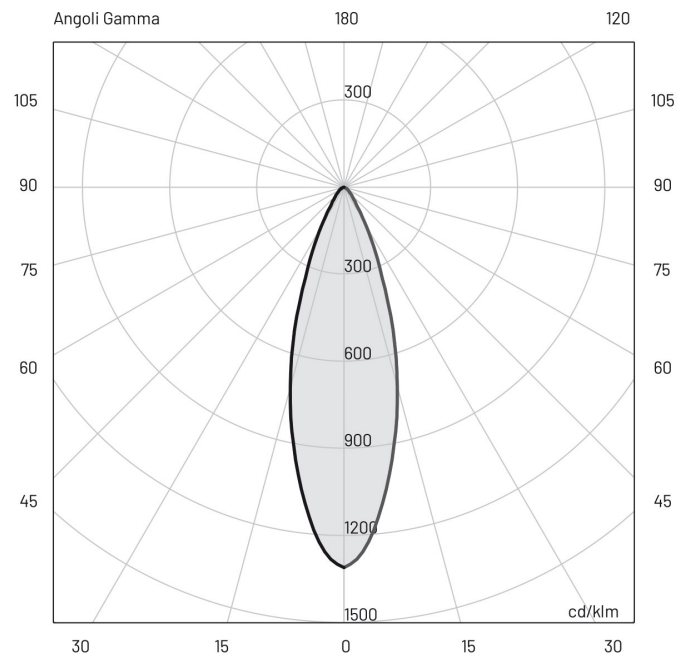

Included accessories

- 1 m length cable H05RN-F

Available accessories

00A469	Mounting spike
0404M009	Single connection IP68