
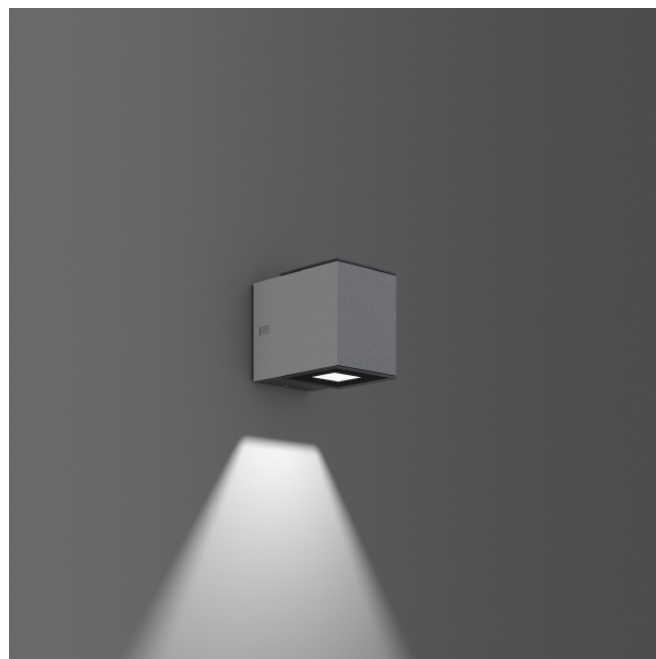



Zono

582028.004 | Wall luminaires

Wall luminaires
4051859228394
LED
L 100, B 154, H 127



Wallscaping: elegant and innovative wall luminaire for accent lighting. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover made of ceramic-coated toughened glass with bayonet lock. Fixing on the wall outside the gasketed volume, drill hole deviations can be compensated. Screwless luminaire fixing via RZB Gravalock® System. Electrical plug and play featuring quick connector. Cable entry granting two cables for loop-through.

Electrical

Control gear	Converter not necessary
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / inrush current duration	20 A / 170 µs
System power	4 W
Luminaire efficacy	35 lm/W

Colour

Colour silver metallic

Dimensions

Length L 100 mm
Width B 154 mm
Height H 127 mm
Weight 1,94 kg

Lamp

Lamp 1 LED
Colour temperature lamp 1 3000K
Colour rendering index (CRI) 1 80
Colour consistency (McAdam) 1 3
Photobiological safety according to EN 62471 Risk group 1

Lighting technology

Colour temperature 3.000 K
Rated luminous flux 140 lm
Glare evaluation UGR (4H 8H) 1 18,1
Beam angle 32° / 34° / 22° / 34°

Approbations

Type of Protection	IP 65
Protection Class	I
Glow Wire Test	960°C - 30 seconds
Impact Protection	IK03 (0,35 Joule)
Safety marks	F-mark
Ambient temperature min.	-20 °C
Ambient temperature max.	40 °C
ULOR	0
Trade mark	CE
CIE Flux Code / CEN Flux Code	97 99 100 100 100
Energy efficiency class LED	A++
Energy class of included lamp	A++