



Perfetto Box



Modern floodlight designed especially for LED COB light sources. It can rotate up to 350° with respect to the vertical axis and pivot up to 90° upwards.

Materials: body and component compartment in polyester painted die-cast aluminum. Reflectors in polycarbonate with mirror finish

Installation: for electrical track, wall mounting, ceiling mounting

Accessories: reflector for beam angle regulation

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Voltage rating	220 ... 240 V
Light source included	Yes

MECHANICAL DATA

Type of installation	for tracks
Housing material	Die cast aluminum

INFORMATION

Rotated model	Yes
---------------	-----

CERTIFICATES


Degree of protection (IP)	IP20
Class of protection	I
CE	Yes
ENEC	Yes

LIGHT DATA

Color rendering index	85
Light distribution	DI
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 50000 h

AVAILABLE VARIANTS

Product code	Light source power [W]	Light source luminous flux [lm]	Beam angle [°]	Colour temperature	Colour
IV743-1613-16	1×26	3100	25	3000K	Black
IV743-1613-21	1×26	3100	25	3000K	White
IV743-2693-16	1×33	4000	30	3000K	Black
IV743-2693-21	1×33	4000	30	3000K	White
IV743-4613-16	1×43	5550	30	3000K	Black
IV743-4613-21	1×43	5550	30	3000K	White
IV743-4613A-16	1×43	5650	30	4000K	Black
IV743-4613A-21	1×43	5650	30	4000K	White

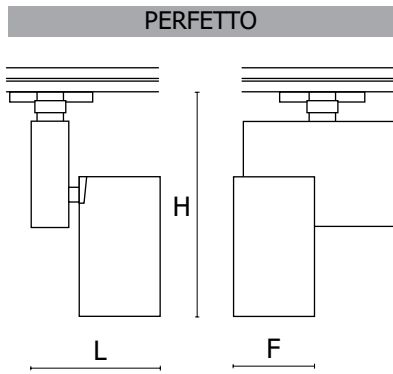

DIMENSIONS

L [mm]	H [mm]	F [mm]
135	185	84

L = Length | H = Height / Depth | F = Outer diameter

ACCESSORIES

Optical element



Kep Kyclos Perfetto Reflector

IV28-3138

angle of beam depends on power of luminaire

IV28-3141

angle of beam depends on power of luminaire