

Cubic LED



Suspended LED luminaire with subtle design for representative rooms. Possibility of painting in any RAL colour. Electric suspension in set.

Materials: Electrostatically painted aluminium profile (standard colour: anthracite), translucent diffuser

Installation: Suspended

Accessories: Empty modules: 400mm, 800mm, 120mm

Power: 230 V

ELECTRICAL DATA

Light source	LED
LED modules	1x
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
Power factor	0.96
SELV	No

MECHANICAL DATA

Type of installation	Suspended
Housing material	Aluminum
Electrical track connection	No

INFORMATION

Colour	Anthracite
Operating temperature range	-20 ... 35 °C

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes
Power Flicker	=< 3%

LIGHT DATA

Light colour	White
Color rendering index	80
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 60000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	90 %

OPTICAL DATA

Diffuser material	Opal/mat plastic
Reflector	High gloss

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Beam angle [°]	Colour temperature
PX4112001 EF001.4466.830.A000	14	1600	114	30	3000K
PX4112022 EF001.4466.840.A000	14	1650	118	30	4000K
PX4112008 EF002.4466.830.A000	14	1600	114	50	3000K


AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Beam angle [°]	Colour temperature
PX4112029 EF002.4466.840.A000	14	1650	118	50	4000K
PX4112015 EF003.4466.830.A000	14	1560	111	70	3000K
PX4112036 EF003.4466.840.A000	14	1610	115	70	4000K
PX4112043 EF005.1166.830.A000	20	2240	112	30	3000K
PX4112064 EF005.1166.840.A000	20	2310	116	30	4000K
PX4112050 EF005.4466.830.A000	20	2240	112	50	3000K
PX4112071 EF005.4466.840.A000	20	2310	116	50	4000K
PX4112057 EF006.4466.830.A000	20	2190	110	70	3000K
PX4112078 EF006.4466.840.A000	20	2260	113	70	4000K
PX4112085 EF007.4466.830.A000	27	2990	111	30	3000K
PX4112106 EF007.4466.840.A000	27	3090	114	30	4000K
PX4112092 EF008.4466.830.A000	27	2990	111	50	3000K
PX4112113 EF008.4466.840.A000	27	3090	114	50	4000K
PX4112099 EF009.4466.830.A000	27	2920	108	70	3000K
PX4112120 EF009.4466.840.A000	27	3020	112	70	4000K

DIMENSIONS

L [mm]	W [mm]	H [mm]
85	85	200

L = Length | W = Width | H = Height / Depth

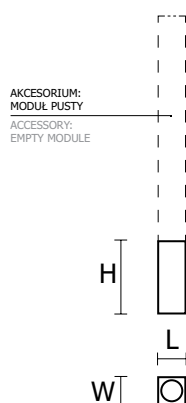

ACCESSORIES

Structural element




Cubic LED empty module
Pieces in set: 1

PX4111925	400 mm	Anthracite
-----------	--------	------------

PX4111932	800 mm	Anthracite
-----------	--------	------------

PX4111939	1200mm	Anthracite
-----------	--------	------------

CUBIC LED

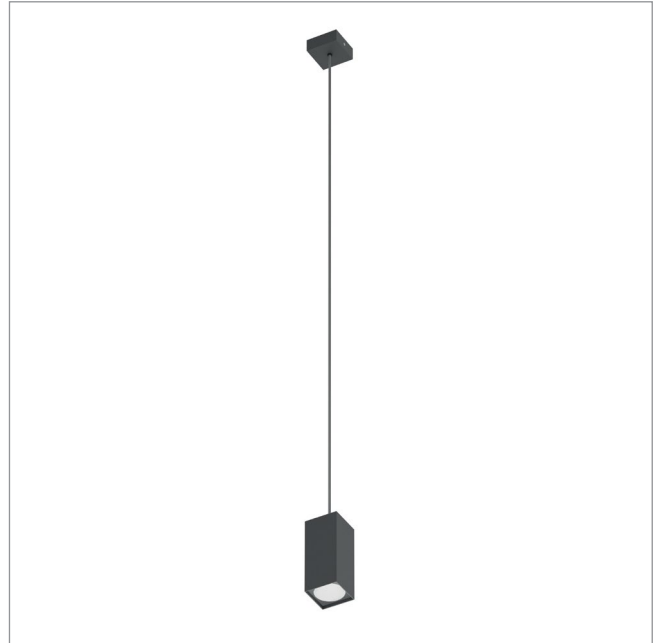

CUBIC LED +400mm



CUBIC LED + 800mm



CUBIC LED +1200



CUBIC LED; +400mm; +800mm; +1200mm



CUBIC LED

