

- Aluminium profile body.
- Aluminium end caps.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and Wireless Tunable White dimming options available upon request.
- Opal diffuser.
- Basic colours: white, black, silver, antracite dark gray and special color options available upon request.
- Emergency kit system can be integrated.
- Steel suspension cord with up to 5mt lenght option.


- Alüminyum profil gövde.
- Alüminyum kapak.
- 220-240V / 50-60Hz enerji giriřli.
- Akıllı soğutma tasarımı.
- 1-10V, DALI ve Kablosuz Dinamik Beyaz dim seçenekleri bulunmaktadır.
- Opal difüzörlü.
- Standart renkler: beyaz, siyah, gri, antrasit koyu gri ve isteğe bađlı özel renk seçenekleri mevcuttur.
- Acil aydınlatma kit sistemi uygulanabilir.
- 5mt uzunluk seçeneđine kadar tercih edilebilir çelik sarkıt tel.

Cubus / I02.LL.19150

SMD LED	.24.35	.24.43	.24.51
Led Power / Led Gücü	32W	40W	47W
System Power / Sistem Gücü	35W	43W	51W
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	2405	3126
	3000K	2479	3223
	3500K	2553	3320
	4000K	2630	3419
	5000K	2710	3522
Lenght / Uzunluk (A)	1135mm	1415mm	1695mm
Ceiling Cutout Dimension / Tavan Delik Ölçüsü	X	X	X
Mains Switch Dim Option / 220V Anahtar Dim Opsiyonu	X	X	X
1-10V Dimming Option / 1-10V Dim Seçeneđi	✓	✓	✓
Dali Dimming Option / Dali Dim Seçeneđi	✓	✓	✓

Suspension Cord

Ray Sarkıtma Teli

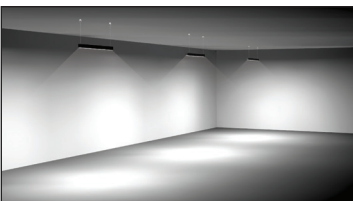

*See page 752 for ldt files.

*Iřık eđrileri için sayfa 752 bakınız.