



## Mirror LED



Wall mounted luminaire recommended for hospital bathrooms and wards

**Materials:** electrostatically painted aluminum profile (gray colour as a standard). OPAL grooven inside diffuser. End caps in set.

**Installation:** wall mounted

**Power:** 230V

### ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Through-wiring	Yes
Light source included	Yes
Power factor	0.96

### MECHANICAL DATA

Type of installation	Universal
Housing material	Aluminum
Electrical track connection	No

### INFORMATION

Colour	Grey
Operating temperature range	-15 ... 40 °C
Rotated model	No

### CERTIFICATES

Degree of protection (IP)	IP44
Class of protection	I
CE	Yes
HACCP+	Yes
Power Flicker	=< 3%

### LIGHT DATA

Luminaire's luminous efficiency	79 %
Light colour	White
Color rendering index	84
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

### OPTICAL DATA

Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal plastic


### AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
PX4451001 AL001.2211.830.A000	11	1350	123	3000K	1.00
PX4451008 AL001.2211.840.A000	11	1390	126	4000K	1.00

## AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
PX4451015 AL002.2211.830.A000	16	2020	126	3000K	1.40
PX4451022 AL002.2211.840.A000	16	2090	131	4000K	1.40
PX4451029 AL003.2211.830.A000	22	2700	123	3000K	1.80
PX4451036 AL003.2211.840.A000	22	2780	126	4000K	1.80

## DIMENSIONS

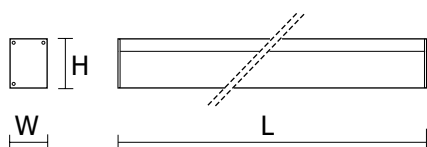

Product code	L [mm]	W [mm]	H [mm]
PX4451001 AL001.2211.830.A000	592	50	60
PX4451008 AL001.2211.840.A000	592	50	60
PX4451015 AL002.2211.830.A000	882	50	60
PX4451022 AL002.2211.840.A000	882	50	60
PX4451029 AL003.2211.830.A000	1172	50	60
PX4451036 AL003.2211.840.A000	1172	50	60

L = Length | W = Width | H = Height / Depth

