



Point NT LED



Nowoczesny projektor na źródła LED COB. Zakres pracy względem osi poziomej wynosi 350°, a pionowej 90°.

Materials: body made of aluminum. Faceted reflectors in polycarbonate with mirror finish

Installation: surface mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Aluminum
Electrical track connection	Yes

INFORMATION

Operating temperature range	0 ... 35 °C
Rotated model	Yes

CERTIFICATES

Degree of protection (IP)	IP20
Degree of protection (IP) / top/	IP20
Class of protection	I
CE	Yes
HACCP+	Yes
EAC	Yes

LIGHT DATA

Luminaire's luminous efficiency	69 %
Light colour	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 60000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	91 %

OPTICAL DATA

Reflector	High gloss
-----------	------------


AVAILABE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Beam angle [°]	Colour temperature	Colour
PX4101001 DS001.1166.830.A000	15	1320	88	20	3000K	White
PX4101022 DS001.1166.840.A000	15	1360	91	20	4000K	White
PX4101043 DS002.1166.830.A000	15	1300	87	45	3000K	White

AVAILABE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Beam angle [°]	Colour temperature	Colour
PX4101064 DS002.1166.840.A000	15	1340	89	45	4000K	White
PX4101008 DS003.1166.830.A000	21	1810	86	20	3000K	White
PX4101029 DS003.1166.840.A000	21	1870	89	20	4000K	White
PX4101071 DS004.1166.840.A000	21	1830	87	45	4000K	White
PX4101050 DS004.1166.830.A000	21	1770	84	45	3000K	White
PX4101015 DS005.1166.830.A000	29	2460	85	20	3000K	White
PX4101036 DS005.1166.840.A000	29	2540	88	20	4000K	White
PX4101057 DS006.1166.830.A000	29	2410	83	45	3000K	White
PX4101078 DS006.1166.840.A000	29	2490	86	45	4000K	White
PX4101085 DS001.3366.830.A000	15	1320	88	20	3000K	Black
PX4101106 DS001.3366.840.A000	15	1360	91	20	4000K	Black
PX4101127 DS002.3366.830.A000	15	1300	87	45	3000K	Black
PX4101148 DS002.3366.840.A000	15	1340	89	45	4000K	Black
PX4101092 DS003.3366.830.A000	21	1810	86	20	3000K	Black
PX4101113 DS003.3366.840.A000	21	1870	89	20	4000K	Black
PX4101134 DS004.3366.830.A000	21	1770	84	45	3000K	Black
PX4101155 DS004.3366.840.A000	21	1830	87	45	4000K	Black
PX4101099 DS005.3366.830.A000	29	2460	85	20	3000K	Black
PX4101120 DS005.3366.840.A000	29	2540	88	20	4000K	Black
PX4101141 DS006.3366.830.A000	29	2410	83	45	3000K	Black
PX4101162 DS006.3366.840.A000	29	2490	86	45	4000K	Black

DIMENSIONS

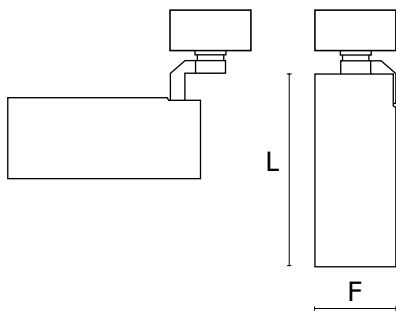

L [mm]	F [mm]
--------	--------

180	80
-----	----

L = Length | F = Outer diameter

MOUNTING HOLES

B

45

B = Spacing width

ACCESSORIES

Optical element



Point LED Shutter honeycomb
Pieces in set: 1

PX4089260
FL024.00.0000

Black